



SPECIFICATION


	MODEL	XZU6 00	XZU64 0	XZU600AT	XZC710	XZC730	XZC740	XZC710AT	XZC730AT	XZC720crew
FULL MODEL CODE		XZU600R - WKMLK3	XZU640R - WKMLK3	XZU600R - WKTLK3	XZC710R - WKFRL3	XZC730R - WKFRL3	XZC740R - WKFRL3	XZC710R - WKTRL3	XZC730R - WKTRL3	XZC720R - ZKFRL3
GVW (Kg)		5,000	5,000	78	7,500	7,500	7,500	R	₹ Pa	7,500
DRIVE SYSTEM	CONFIGURATION	4 x 2	4 x 2	<u> </u>	4 x 2	4 x 2	4 x 2			4 x 2
	NO. OF WHEEL	4 Wheeler	4 Wheeler	Ĭ	6 Wheeler	6 Wheeler	6 Wheeler	Š	Š	6 Wheeler
CAB STYLE		Standard Cab	Standard Cab	2	Wide Cab	Wide Cab	Wide Cab	Ų,		Crew Cab
STANDARD WHEELBASE (mm)		2525	3075		3500	4100	4400		1	3800
ENGINE	MODEL	N04C - WG	N04C - WG		N04C - WH	N04C - WH	N04C - WH			N04C - WH
	DISPLACEMENT (cc)	4,009	4,009	ğ	4,009	4,009	4,009	(0)		4,009
	EMISSION	Euro 3	Euro 3	ĬŠ.	Euro 3	Euro 3	Euro 3	ĬŠ.	ĬŠ.	Euro 3
	TYPE	Commonrail, Turbo Charged, Intercooled	Commonrail, Turbo Charged, Intercooled		Commonrail, Turbo Charged, Intercooled	Commonrail, Turbo Charged, Intercooled	Commonrail, Turbo Charged, Intercooled			Commonrail, Turbo Charged, Intercooled
	MAX OUTPUT (PS)	104 (141) / 2,500	104 (141) / 2,500	<u> </u>	115 (156) / 2,800	115 (156) / 2,800	115 (156) / 2,800	<u>P</u>	TO .	115 (156) / 2,800
	MAX TORQUE (Nm)	402 (41) / 1,600	402 (41) / 1,600	0	430 (44) / 1,400	430 (44) / 1,400	430 (44) / 1,400	O O	0	430 (44) / 1,400
TRANSMISSION / MODEL		Manual 5-Speed / RE50	Manual 5-Speed / RE50	duy	Manual 6-Speed / RE61	Manual 6-Speed / RE61	Manual 6-Speed / RE61	du	duy	Manual 6-Speed / RE61
SERVICE BRAKES		Vacuum Servo Hydraulic	Vacuum Servo Hydraulic		Vacuum Servo Hydraulic	Vacuum Servo Hydraulic	Vacuum Servo Hydraulic			Vacuum Servo Hydraulic
REAR AXLE MODEL		BD26A	BD26A		SH12-1	SH12-1	SH12-1			SH12-1














HINO MOTORS SALES (MALAYSIA) SDN BHD (187863-U)

Selangor: Lot PT 24, Jalan 223, Section 51A, 46100 Petaling Jaya, Selangor Darul Ehsan, Malaysia. Tel: (603) 7957 5199 (12 lines) Fax: (063) 7954 3276 Sarawak: No. 230, Lot 3477, Block 226, KKND (P/L 2543), Jalan Kung Phin, 93250 Kuching, Sarawak, Malaysia. Tel: (082) 451 611 (5 lines) Fax: (082) 451 993 Sabah: Miles 4 1/2 Jalan Tuaran, Lot No. 353, Taman Cempaka, Likas, 88450 Kota Kinabalu, Sabah, Malaysia. Tel: (088) 393 663 Fax: (088) 424 223 www.hino.com.my


















HINO

Series PRO

Strong, Spacious, Safety, Smart Built for Ultimate Customer Success



STRONG

SPACIOUS

▼ HORSEPOWER & TORQUE


High horsepower and torque engines that offers powerful drive for all application and road condition

4 WHEELER

MAX OUTPUT (PS / rpm) 141 PS / 2,500 rpm

MAX TORQUE (Nm/rpm) 402 N.m / 1,600 rpm

6 WHEELER



MAX OUTPUT (PS / rpm)

156 PS / 2,800 rpm

MAX TORQUE (Nm/rpm) 430 N.m / 1,400 rpm

▼ TRANSMISSION

Comes with manual and fully automatic transmission that best-fit to customer business field



EURO BENGINE

6-SPEED AUTOMATIC TRANSMISSION

This system is designed for smooth automatic gear changes and superior fuel efficiency that gives easier and comfortable driving



MANUAL TRANSMISSION

4-wheeler comes with 5-speed manual transmission, 6-wheeler with 6-speed manual transmission for smooth acceleration from stationary position



▲ GVW UP TO 5 TONNE

The highest Gross Vehicle Weight (GVW) in its category up to 5 tonne (5,000 kg)

6 WHEELER






▲ BIGGEST BODY IN ITS CLASS

Widest rear tread in its category that is convenient to fit two wooden pallets side by side


Note: Measurement various from body

SAFETY

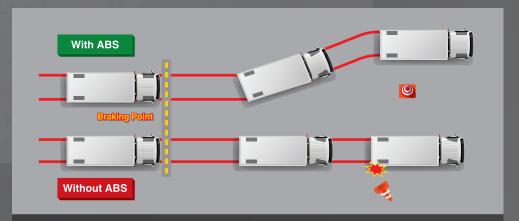

▲ ANTILOCK BRAKING SYSTEM (ABS)

An active safety feature designed to help driver retain steering control by preventing wheels from locking up during emergency braking



▲ ELECTRONIC BRAKEFORCE DISTRIBUTION (EBD) Optimizes brake force depending on the

load to ensure optimal braking system



▲ BRAKE OVERRIDE SYSTEM (BOS)

As a failsafe measure when acceleration and brake pedal are being pressed at the same time, priority will be given to braking



Priority to brake pedal

▼ THEFT MONITORING & SOS CALLMonitor against break-in scenarios for your vehicle with 24-hour call center support and provide highly accurate location information that improves asset visibility


SMART



▲ HINO CONNECT SYSTEM

Supports logistics operation in improving operational efficiency in terms of increase of profit, improve safety and security, encourage good driving behaviour, reduce unplanned downtime, and monitor truck maintenance by understanding the key elements of vehicle





▲ myHINO MOBILE APP

A specialized mobile application designed to link with HINO CONNECT System that allows user to track and monitor their vehicle in operation at one's fingertips

Note: Some images may be used for illustration purposes only.