


SPECIFICATION

		NICKNAME		XZU710K		XZU720K		
ITEM		MODEL CODE		XZU710R-HKMQK3		XZU720R-HKMQK3		
ENGINE	MODEL		N04C-VA					
	TYPE		Diesel, 4-cy.,vertical, 4-cyl. in-line, overhead valve, water cooled, direct injection					
	DISPLACEMENT		cc	4,009				
	MAX OUTPUT (JIS GROSS)		kW(PS)/rpm	104 (142) / 2,500				
	MAX. TORQUE (JIS GROSS)		Nm(kgfm)/rpm	402 (41) / 1,600				
	BORE & STROKE		mm	104 x 118				
	FUEL INJECTION SYSTEM		Electronic control Commonrail type					
	AIR INTAKE SYSTEM		Turbo-intercooled, stack type					
CLUTCH	MAX.ENGINE SPEED		rpm	3,000				
	TYPE		Dry single plate, diaphragm type with damper spring					
TRANSMISSION	DIAMETER		mm	300				
	MODEL/NO. OF SPEED		M550 / Manual 5-Speed					
	TYPE		Five (5) forward and one (1) reverse, overdrive, synchromesh 1 st - 5 th					
AXLE	RATIO (1st - Top)		4.981 / 0.738					
	FRONT	TYPE	Reversed Elliot, "I" section beam					
		CAPACITY	kg	3,100				
	REAR	TYPE	Full floating, single reduction, single speed by hypoid gearing					
BRAKE			kg	5,100				
	CAPACITY		kg					
	SERVICE BRAKE TYPE		Hydraulic system with two leading shoes for front wheels and dual two leading shoes for rear wheels with auto brake shoe adjuster					
	SERVICE BRAKE CONTROL		Vacuum servo hydraulic, dual circuits with Antilock Braking System (ABS) and power assist					
SUSPENSION	PARKING BRAKE TYPE		Mechanical, internal expanding, acting on transmission output shaft					
	EXHAUST BRAKE TYPE		Electric-vacuum actuator with valve in exhaust pipe					
FRAME	FRONT		TYPE	Semi elliptic leaf spring with dual acting shock absorber and stabilizer				
	REAR		TYPE	Semi elliptic main and auxiliary leaf spring with dual acting shock absorber				
CABIN	FRAME WIDTH		mm	750				
	HEIGHT x WIDTH x THICKNESS		mm	192.8 x 65 x 5.9				
WHEELS & TIRES	TILTING		Mechanical Type					
	STEERING		Telescopic & tilt steering column with locking device, recirculating ball with hydraulic booster, integral type					
	HINO ARMTECH		Equipped					
	POWER WINDOW		Equipped					
	CENTRAL LOCKING		Equipped					
	SEAT BELT		Equipped					
ELECTRICAL	WHEEL TYPE		6 Stud					
	WHEEL SIZE		17.5 x 6.00GS - 127					
	TIRE SIZE		215/75 R 17.5 - 12PR					
FUEL TANK CAPACITY	TYPE		24V, Negative Earth					
	BATTERIES		12V x 2, Series connection					
	ALTERNATOR CAPACITY		24V - 60 Amps					
PERFORMANCE			100					
G.V.W Rating			kg	7,500				
PERFORMANCE			MAX SPEED	km/h	100 (* With Speed Limiter)			
			GRADEABILITY	(tan Ø) %	43.8			
TRANSMISSION RATIO	MODEL		M550					
	1st		4.981					
	2nd		2.911					
	3rd		1.556					
	4th		1.000					
	5th		0.738					
	REVERSE		4.625					
REAR AXLE	MODEL		SH12					
	RATIO		5.375					
DIMENSION & MASS								
CHASSIS MASS (with std tools set & spare tire)	FRONT AXLE		kg	1,580		1,595		
	REAR AXLE		kg		910			
	TOTAL		kg	2,490		2,505		
DIMENSION	WHEELBASE		WB	mm	3,430		3,870	
	OVERALL LENGTH		OL	mm	6,120		6,740	
	OVERALL WIDTH		OW	mm		1,995		
	OVERALL HEIGHT		OH	mm		2,230		
	CAB TO AXLE CENTER		CA	mm	2,870		3,310	
	FRONT OVERHANG		FOH	mm		1,115		
	REAR OVERHANG		ROH	mm	1,575		1,755	
	FRONT TREAD		FT	mm		1,655		
	REAR TREAD		RT	mm		1,520		
	TURNING RADIUS (on tire)			mm	5,700		6,400	
SEATING CAPACITY					3			

HINO MOTORS SALES (MALAYSIA) SDN. BHD. is engaged in an ongoing research and development program, and reserves the right to change specification without prior notice in order to pass on to the customer any resulting advances or technical refinements. All specifications of the product are within normal manufacturing allowances and tolerances.

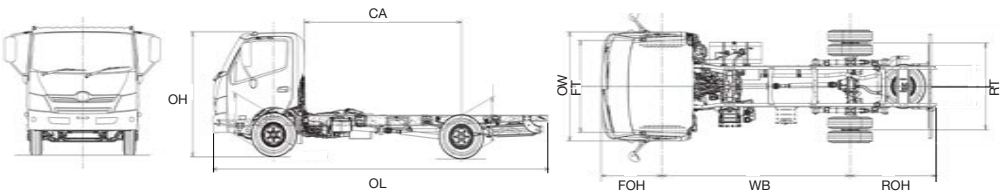

HINO Authorized Dealer:

Ver. 04/10.2019



HINO 300 SERIES



Compliance with United Nations Regulation (UNR) by JPJ



XZU710K 142ps

XZU720K 142ps

Designed GVW 7,500 kg
(6 Wheeler)




Terms and Conditions apply*

HINO MOTORS SALES (MALAYSIA) SDN BHD (187863-U)

Selangor: Lot PT 24, Jalan 223, Section 51A, 46100 Petaling Jaya, Selangor Darul Ehsan, Malaysia. Tel: (603) 7957 5199 (12 lines) Fax: (603) 7954 3276
Sarawak: No. 230, Lot 3477, Block 226, KKND (P/L 2543), Jalan Kung Phin 93250 Kuching, Sarawak, Malaysia. Tel: (082) 451 611 (5 lines) Fax: (082) 451 993
Sabah: Miles 4 1/2 Jalan Tuaran, Lot No. 353, Taman Cempaka, Likas, 88450 Kota Kinabalu, Sabah, Malaysia. Tel: (088) 393 663 Fax: (088) 424 223

www.hino.com.my

PERFORMANCE


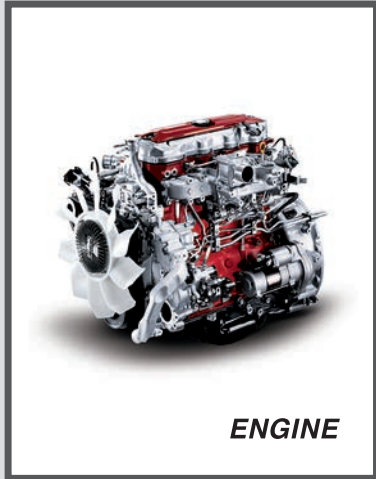


ENGINE

EURO3
XZU710K
XZU720K

Model:
N04C-VA
Type:
**4,009cc 4-cylinder in-line
Electronic Control
Commonrail**

Output (kW/rpm):
104 (142PS)/2,500rpm
Torque (Nm/rpm):
402Nm (41kgfm)/1,600rpm

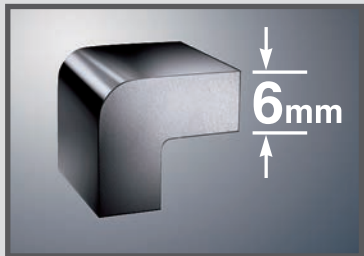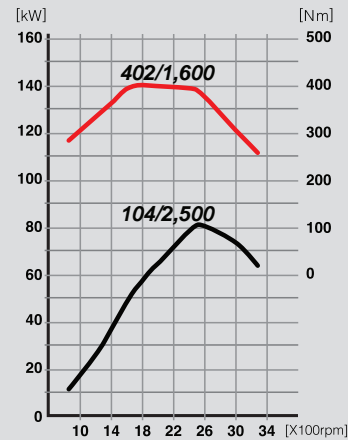

Frame


The frame is both very strong and lightweight



Suspension

The leaf spring suspension offers high durability and flexibility for stability on rough roads.

COMFORTABILITY

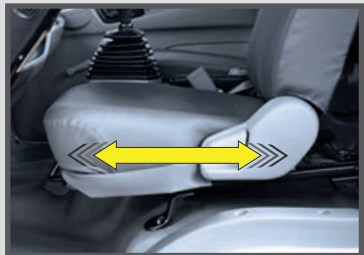

Seat Slide

The seat rails are set on an incline to accommodate your seating position.



Folding Type Shift Lever

The shift lever and side lever fold down, making it easy to move around the driver compartment.



LED Meter Panel

The meter cluster features highly visible readouts of necessary vehicle information.



Overhead Console

Greater convenience for documents storage with open section which allows easy access.



Wide Free Rack


Ergonomically designed open storage space and within driver's reach for greater convenience.



Work Space

Intuitively designed, spacious and comfortable, the cab space allows drivers to perform at their best.

SAFETY

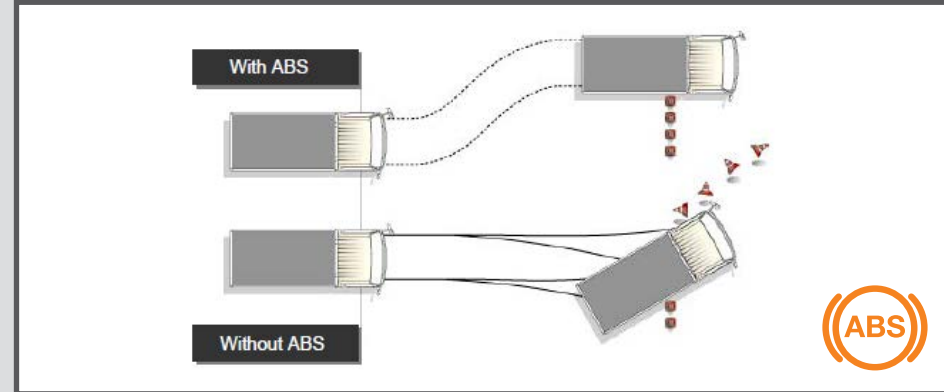

Antilock Braking System (ABS)

ABS helps the driver maintain control of the vehicle when braking on a slippery surface by selectively controlling the braking force of individual wheel in order to prevent the wheels from locking.



EGIS Cab (Emergency Guard Impact Safety)

The EGIS Cab Design is one of HINO'S passive safety features, enhancing the rigidity of the cab.




Drum Brake

Equipped with auto brake shoe adjuster to ensure safe & effective braking. It features easy maintenance without compromising on performance.



Tubeless Tyres

Provides good tyre puncture resistance for better safety. Better fuel efficiency due to lighter tyre and lower rolling resistance.



Stabilizer

The stabilizer have been lengthened and feature a link bracket, maintaining high effectiveness and stability.



Door Impact Beams

The side impact beams built into the doors of 300 Series increase the level of protection for driver and passenger in the event of a collision from the side.




Side Mirror

The door-mounted outer mirrors enhance driver's vision. It features partitioned mirror surfaces encased in an aerodynamic and low-profile shell.




Wide View Pillars

The front pillars are designed to be as narrow as possible to ensure a nearly uninterrupted view, allowing the driver to easily see pedestrians and cyclist, without any compromise in structural integrity.



Energy-Absorbing Steering Wheel and Column


The energy-absorbing steering wheel and column reduce collision force.



Headlamp Leveling Switch

The Headlamp Leveling Switch can be used to adjust the headlamp illumination distance.

APPLICATION

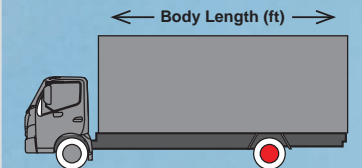

Model	XZU710K ECO	
Standard	14'10"	
Optional	20'4"	21'7"

Model	XZU720K ECO	
Standard	17'	
Optional	20'4"	21'7"


● Drive Axle

Body Type


A truck for every application of bodies suit your type of business.




General Cargo




Box




Curtain Sider



Refrigerated



Tipper




Crane Cargo



Roll On Roll off



Tanker



Garbage Compactor

Note : Some images may be used for illustration purposes only.