


# SPECIFICATION

		MODEL	<b>XZU710L</b>	<b>XZU720L</b>	<b>XZU730L</b>	
ITEM	MODEL CODE		XZU710R - HKMQL3	XZU720R - HKMQL3	XZU730R - HKMQL3	
ENGINE	MODEL	N04C-VB				
	TYPE	Diesel, 4-cyl., vertical, 4-cyl. in-line, overhead valve, water cooled, direct injection				
	DISPLACEMENT	cc	4,009			
	MAX OUTPUT (JIS GROSS)	kW(PS)/rpm	114 (156) / 2,800			
	MAX. TORQUE (JIS GROSS)	Nm(kgfm)/rpm	429 (43.8) / 1,400			
	BORE & STROKE	mm	104 x 118			
	FUEL INJECTION SYSTEM		Electronic control commonrail type			
	AIR INTAKE SYSTEM		Turbo-intercooled, stack type			
CLUTCH	MAX. ENGINE SPEED	rpm	3,100			
	TYPE		Dry single plate, diaphragm type with damper spring			
TRANSMISSION	DIAMETER	mm	325			
	MODEL/NO. OF SPEED		M550 / Manual 5-Speed			
	TYPE		Five (5) forward and one (1) reverse, overdrive, synchromesh 1 <sup>st</sup> - 5 <sup>th</sup>			
AXLE	RATIO (1st - Top)		4.981 / 0.738			
	FRONT TYPE		Reversed Elliot, "I" section beam			
	CAPACITY	kg	3,100			
	REAR TYPE		Full floating, single reduction, single speed by hypoid gearing			
BRAKE	CAPACITY	kg	5,100			
	SERVICE BRAKE TYPE		Hydraulic system with two leading shoes for front wheels and dual two leading shoes for rear wheels with auto brake shoe adjuster			
	SERVICE BRAKE CONTROL		Vacuum servo hydraulic, dual circuits with Antilock Braking System (ABS) and power assist			
	PARKING BRAKE TYPE		Mechanical, internal expanding, acting on transmission output shaft			
SUSPENSION	EXHAUST BRAKE TYPE		Electric-vacuum actuator with valve in exhaust pipe			
	FRONT TYPE		Semi elliptic leaf spring with dual acting shock absorber and stabilizer			
FRAME	REAR TYPE		Semi elliptic main and auxiliary leaf spring with dual acting shock absorber			
	FRAME WIDTH	mm	750			
CABIN	HEIGHT x WIDTH x THICKNESS	mm	192.8 x 65 x 5.9			
	TILTING		Mechanical Type			
	STEERING		Telescopic & tilt steering column with locking device, recirculating ball with hydraulic booster, integral type			
	HINO ARMTECH		Equipped			
	POWER WINDOW		Equipped			
	CENTRAL LOCKING		Equipped			
WHEELS & TIRES	SEAT BELT		Equipped			
	WHEEL TYPE		6 studs			
	RIM SIZE		17.5 x 6.00GS - 127			
ELECTRICAL	TIRE SIZE		215/75 R 17.5 - 12PR			
	TYPE		24V, Negative Earth			
	BATTERIES		12V x 2, Series connection			
FUEL TANK CAPACITY	L	100				
<b>PERFORMANCE</b>						
G.V.W Rating	kg	7,500				
PERFORMANCE	MAX SPEED	km/h	100 (* With Speed Limiter)			
	GRADEABILITY	(tan Ø) %	44.9			
TRANSMISSION RATIO	MODEL		M550			
	1st		4.981			
	2nd		2.911			
	3rd		1.556			
	4th		1.000			
	5th		0.738			
REAR AXLE	REVERSE		4.625			
	MODEL		SH12			
	RATIO		5.125			
<b>DIMENSION &amp; MASS</b>						
CHASSIS MASS (with std tools set & spare tire)	FRONT AXLE	kg	1,580	1,595	1,615	
	REAR AXLE	kg	910	910	925	
	TOTAL	kg	2,490	2,505	2,540	
DIMENSION	WHEELBASE	WB	mm	3,430	3,870	4,200
	OVERALL LENGTH	OL	mm	6,120	6,740	7,250
	OVERALL WIDTH	OW	mm		1,995	
	OVERALL HEIGHT	OH	mm		2,230	
	CAB TO AXLE CENTER	CA	mm	2,870	3,310	3,640
	FRONT OVERHANG	FOH	mm		1,115	
	REAR OVERHANG	ROH	mm	1,575	1,755	1,935
	FRONT TREAD	FT	mm		1,655	
	REAR TREAD	RT	mm		1,520	
	TURNING RADIUS (on tire)		mm	5,700	6,400	6,900
	SEATING CAPACITY			3		

HINO MOTORS SALES (MALAYSIA) SDN. BHD. is engaged in an ongoing research and development program, and reserves the right to change specification without prior notice in order to pass on to the customer any resulting advances or technical refinements. All specifications of the product are within normal manufacturing allowances and tolerances.

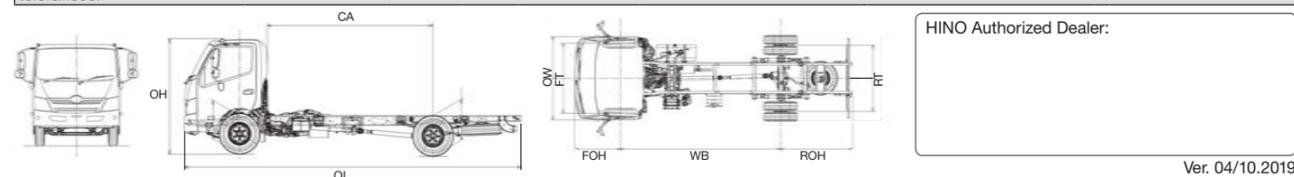

Ver. 04/10.2019



# HINO 300 SERIES

POWER

Compliance with United Nations Regulation (UNR) by JPJ



**XZU710L** 156ps  
**XZU720L** 156ps  
**XZU730L** 156ps

Designed GVW 7,500 kg  
(6 Wheeler)




Terms and Conditions apply\*

HINO MOTORS SALES (MALAYSIA) SDN BHD (187863-U)

Selangor: Lot PT 24, Jalan 223, Section 51A, 46100 Petaling Jaya, Selangor Darul Ehsan, Malaysia. Tel: (603) 7957 5199 (12 lines) Fax: (603) 7954 3276  
 Sarawak: No. 230, Lot 3477, Block 226, KKND (P/L 2543), Jalan Kung Phin 93250 Kuching, Sarawak, Malaysia. Tel: (082) 451 611 (5 lines) Fax: (082) 451 993  
 Sabah: Miles 4 1/2 Jalan Tuaran, Lot No. 353, Taman Cempaka, Likas, 88450 Kota Kinabalu, Sabah, Malaysia. Tel: (088) 393 663 Fax: (088) 424 223

www.hino.com.my

## PERFORMANCE

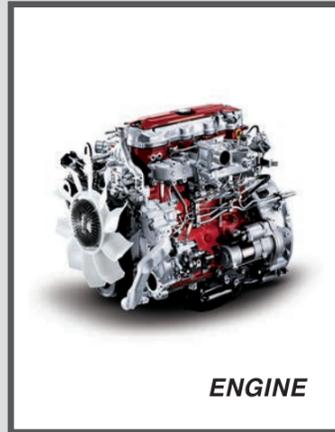

ENGINE



**EURO 3**

**XZU710L**  
**XZU720L**  
**XZU730L**

Model:  
**N04C-VB**  
Type:  
4,009cc 4-cylinder in-line  
Electronic Control  
Commonrail

Output (kW/rpm):  
**114 (156PS)/2,800rpm**

Torque (Nm/rpm):  
**429Nm (43.8kgfm)/1,400rpm**

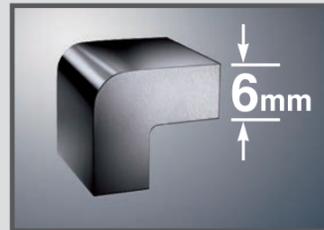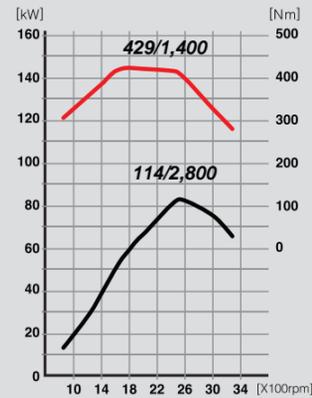

Frame


The frame is both very strong and lightweight



Suspension

The leaf spring suspension offers high durability and flexibility for stability on rough roads.

## COMFORTABILITY

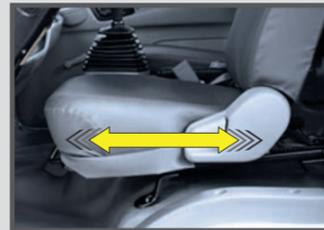

Seat Slide

The seat rails are set on an incline to accommodate your seating position.



Folding Type Shift Lever

The shift lever and side lever fold down, making it easy to move around the driver compartment.



LED Meter Panel

The meter cluster features highly visible readouts of necessary vehicle information.



Overhead Console

Greater convenience for documents storage with open section which allows easy access.



Wide Free Rack


Ergonomically designed open storage space and within driver's reach for greater convenience.



Work Space

Intuitively designed, spacious and comfortable, the cab space allows drivers to perform at their best.

## SAFETY

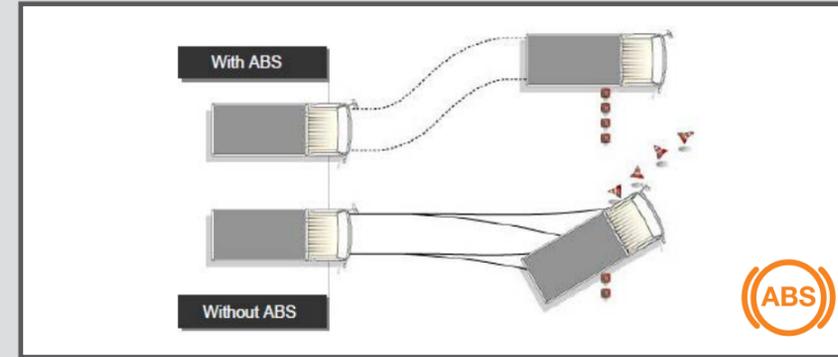

Antilock Braking System (ABS)

ABS helps the driver maintain control of the vehicle when braking on a slippery surface by selectively controlling the braking force of individual wheel in order to prevent the wheels from locking.



EGIS Cab (Emergency Guard Impact Safety)

The EGIS Cab Design is one of HINO'S passive safety features, enhancing the rigidity of the cab.



Drum Brake

Equipped with auto brake shoe adjuster to ensure safe & effective braking. It features easy maintenance without compromising on performance.



Tubeless Tyres

Provides good tyre puncture resistance for better safety. Better fuel efficiency due to lighter tyre and lower rolling resistance.



Stabilizer

The stabilizer have been lengthened and feature a link bracket, maintaining high effectiveness and stability.



Door Impact Beams

The side impact beams built into the doors of 300 Series increase the level of protection for driver and passenger in the event of a collision from the side.




Side Mirror

The door-mounted outer mirrors enhance driver's vision. It features partitioned mirror surfaces encased in an aerodynamic and low-profile shell.



Wide View Pillars

The front pillars are designed to be as narrow as possible to ensure a nearly uninterrupted view, allowing the driver to easily see pedestrians and cyclist, without any compromise in structural integrity.



Energy-Absorbing Steering Wheel and Column


The energy-absorbing steering wheel and column reduce collision force.



Headlamp Leveling Switch

The Headlamp Leveling Switch can be used to adjust the headlamp illumination distance.

## APPLICATION

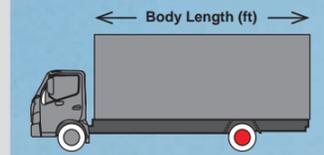

Model	XZU710L	XZU720L
Standard	14'10"	17'
Optional	20'4" 21'7"	20'4" 21'7"

Model	XZU730L	Drive Axle
Standard	18'8"	
Optional	20'4" 21'7"	

### Body Type


A truck for every application of bodies suit your type of business.




General Cargo



Box




Curtain Sider



Refrigerated



Tipper




Crane Cargo



Roll On Roll off



Tanker



Garbage Compactor

Note : Some images may be used for illustration purposes only.