


SPECIFICATION

		MODEL	XZU720LA		XZU730LA	
ITEM	MODEL CODE		XZU720R - HKTQL3		XZU730R - HKTQL3	
ENGINE	MODEL		N04C-VB			
	TYPE		Diesel, 4-cy.,vertical, 4-cyl. in-line, overhead valve, water cooled, direct injection			
	DISPLACEMENT		cc			
	MAX OUTPUT (JIS GROSS)		kW(PS)/rpm			
	MAX. TORQUE (JIS GROSS)		Nm(kgfm)/rpm			
	BORE & STROKE		mm			
	FUEL INJECTION SYSTEM		Electronic control Commonrail type			
	AIR INTAKE SYSTEM		Turbo-intercooled, stack type			
MAX.ENGINE SPEED		rpm				
TRANSMISSION	MODEL/NO. OF SPEED		A860E / Automatic 6-Speed			
	TYPE		Six (6) forward and one (1) reverse, overdrive			
	RATIO (1st - Top)		3.742 / 0.634			
AXLE	FRONT	TYPE	Reversed Elliot, "I" section beam			
		CAPACITY	kg			
	REAR	TYPE	Full floating, single reduction, single speed by hypoid gearing			
		CAPACITY	kg			
BRAKE	SERVICE BRAKE TYPE		Hydraulic system with two leading shoes for front wheels and dual two leading shoes for rear wheels with auto brake shoe adjuster			
	SERVICE BRAKE CONTROL		Vacuum servo hydraulic, dual circuits with Antilock Braking System (ABS) and power assist			
	PARKING BRAKE TYPE		Mechanical, internal expanding, acting on transmission output shaft			
	EXHAUST BRAKE TYPE		Electric-vacuum actuator with valve in exhaust pipe			
SUSPENSION	FRONT	TYPE	Semi elliptic leaf spring with dual acting shock absorber and stabilizer			
	REAR	TYPE	Semi elliptic main and auxiliary leaf spring with dual acting shock absorber			
FRAME	FRAME WIDTH		mm			
	HEIGHT x WIDTH x THICKNESS		mm			
CABIN	TILTING		Mechanical Type			
	STEERING		Telescopic & tilt steering column with locking device, recirculating ball with hydraulic booster, integral type			
	HINO ARMTECH		Equipped			
	POWER WINDOW		Equipped			
	CENTRAL LOCKING		Equipped			
	SEAT BELT		Equipped			
WHEELS & TIRES	WHEEL TYPE		6 Stud			
	RIM SIZE		17.5 x 6.00GS - 127			
	TIRE SIZE		215/75 R 17.5 - 12PR			
ELECTRICAL	TYPE		24V, Negative Earth			
	BATTERIES		12V x 2 , Series connection			
	ALTERNATOR CAPACITY		24V - 60 Amps			
FUEL TANK CAPACITY		L		100		
PERFORMANCE						
G.V.W Rating		kg		7,500		
PERFORMANCE	MAX SPEED		km/h		100 (* With Speed Limiter)	
	GRADEABILITY		(tan Ø) %		60	
TRANSMISSION RATIO	MODEL		A860E			
	1st		3.742			
	2nd		2.003			
	3rd		1.343			
	4th		1.000			
	5th		0.773			
	6th		0.634			
	REVERSE		3.697			
REAR AXLE	MODEL		SH12			
	RATIO		5.125			
DIMENSION & MASS						
CHASSIS MASS (with std tools set & spare tire)	FRONT AXLE		kg		1,645	
	REAR AXLE		kg		920	
	TOTAL		kg		2,565	
DIMENSION	WHEELBASE		WB		mm	
	OVERALL LENGTH		OL		mm	
	OVERALL WIDTH		OW		mm	
	OVERALL HEIGHT		OH		mm	
	CAB TO AXLE CENTER		CA		mm	
	FRONT OVERHANG		FOH		mm	
	REAR OVERHANG		ROH		mm	
	FRONT TREAD		FT		mm	
	REAR TREAD		RT		mm	
	TURNING RADIUS (on tire)				mm	
	SEATING CAPACITY					

HINO MOTORS SALES (MALAYSIA) SDN. BHD. is engaged in an ongoing research and development program, and reserves the right to change specification without prior notice in order to pass on to the customer any resulting advances or technical refinements. All specifications of the product are within normal manufacturing allowances and tolerances.

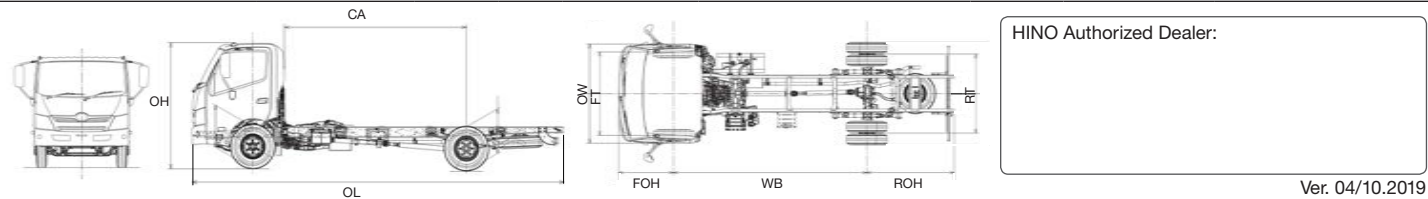

HINO 300 SERIES

Compliance with United Nations Regulation (UNR) by JPJ



XZU720 AUTO

156ps

XZU730 AUTO

156ps

Designed GVW 7,500 kg (6 Wheeler)

WARRANTY 5 YEARS or 200,000KM

FREE SERVICE PROGRAM 3 TIMES (1st-3rd Service)

FREE PARTS PROGRAM 7 TIMES (4th-10th Service)

PROTECTED BY HINO ArmTech

BREAKDOWN 24 HOURS SERVICE


Terms and Conditions apply*

HINO MOTORS SALES (MALAYSIA) SDN BHD (187863-U)

Selangor: Lot PT 24, Jalan 223, Section 51A, 46100 Petaling Jaya, Selangor Darul Ehsan, Malaysia. Tel: (603) 7957 5199 (12 lines) Fax: (603) 7954 3276
Sarawak: No. 230, Lot 3477, Block 226, KKND (P/L 2543), Jalan Kung Phin 93250 Kuching, Sarawak, Malaysia. Tel: (082) 451 611 (5 lines) Fax: (082) 451 993
Sabah: Miles 4 1/2 Jalan Tuaran, Lot No. 353, Taman Cempaka, Likas, 88450 Kota Kinabalu, Sabah, Malaysia. Tel: (088) 393 663 Fax: (088) 424 223



www.hino.com.my

PERFORMANCE

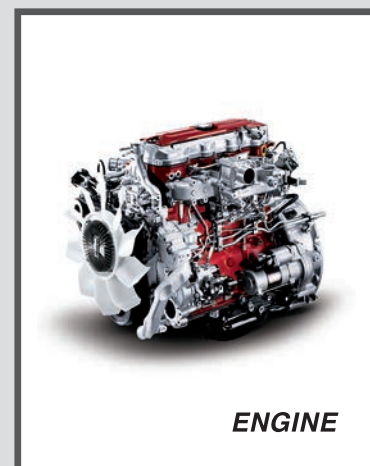

EURO3
XZU720 Auto
XZU730 Auto

Model:
N04C-VB
Type:
**4,009cc 4-cylinder in-line
Electronic Control
Commonrail**
Output (kW/rpm):
114 (156PS)/2,800rpm
Torque (Nm/rpm):
429Nm (43.8kgfm)/1,400rpm

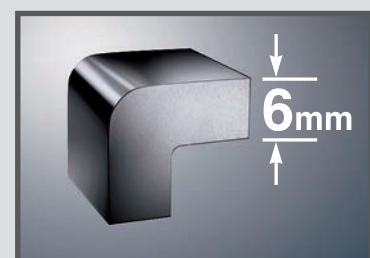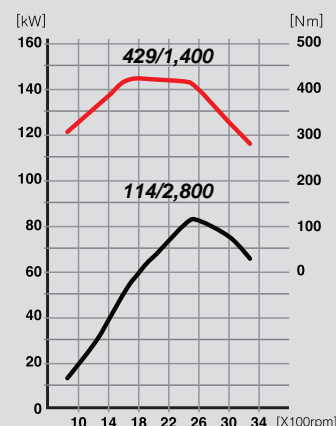

Frame


The frame is both very strong and lightweight



Suspension

The leaf spring suspension offers high durability and flexibility for stability on rough roads.

COMFORTABILITY

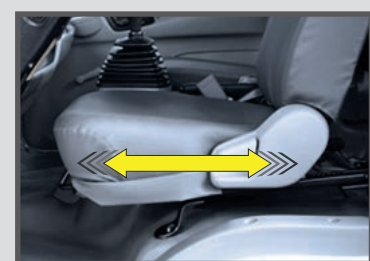

Seat Slide

The seat rails are set on an incline to accommodate your seating position.



Folding Type Automatic Transmission

The shift lever and side lever fold down, making it easy to move around the driver compartment.



LED Meter Panel

The meter cluster features highly visible readouts of necessary vehicle information.



Overhead Console

Greater convenience for documents storage with open section which allows easy access.



Wide Free Rack


Ergonomically designed open storage space and within driver's reach for greater convenience.



Work Space

Intuitively designed, spacious and comfortable, the cab space allows drivers to perform at their best.

SAFETY

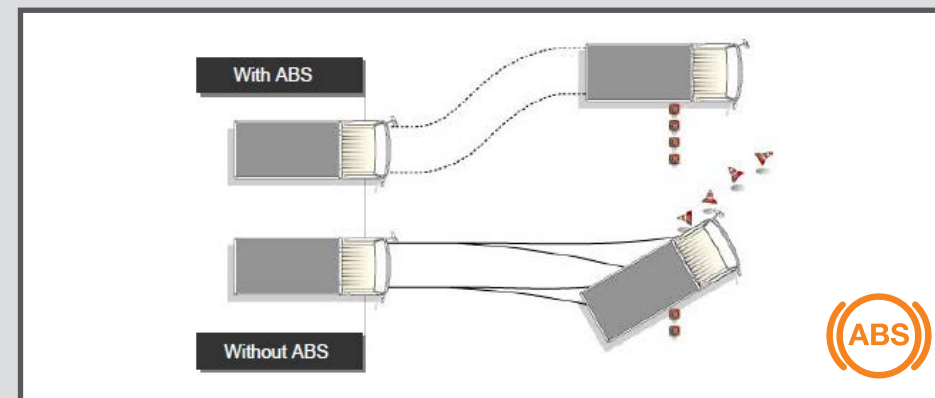

Antilock Braking System (ABS)

ABS helps the driver maintain control of the vehicle when braking on a slippery surface by selectively controlling the braking force of individual wheel in order to prevent the wheels from locking.



EGIS Cab (Emergency Guard Impact Safety)

The EGIS Cab Design is one of HINO'S passive safety features, enhancing the rigidity of the cab.



Drum Brake

Equipped with auto brake shoe adjuster to ensure safe & effective braking. It features easy maintenance without compromising on performance.



Tubeless Tyres

Provides good tyre puncture resistance for better safety. Better fuel efficiency due to lighter tyre and lower rolling resistance.



Stabilizer

The stabilizer have been lengthened and feature a link bracket, maintaining high effectiveness and stability.



Door Impact Beams

The side impact beams built into the doors of 300 Series increase the level of protection for driver and passenger in the event of a collision from the side.




Side Mirror

The door-mounted outer mirrors enhance driver's vision. It features partitioned mirror surfaces encased in an aerodynamic and low-profile shell.



Wide View Pillars

The front pillars are designed to be as narrow as possible to ensure a nearly uninterrupted view, allowing the driver to easily see pedestrians and cyclist, without any compromise in structural integrity.



Energy-Absorbing Steering Wheel and Column


The energy-absorbing steering wheel and column reduce collision force.



Headlamp Leveling Switch

The Headlamp Leveling Switch can be used to adjust the headlamp illumination distance.

APPLICATION

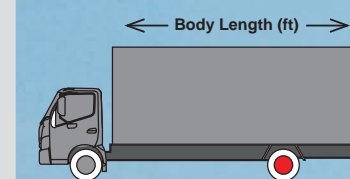


Model	XZU720 (Auto)	XZU730 (Auto)
Standard	17'	18'8"
Optional	20'4"	21'7"


● Drive Axle

Body Type


A truck for every application of bodies suit your type of business.




General Cargo



Box




Curtain Sider



Refrigerated



Tipper




Crane Cargo



Roll On Roll off



Tanker



Garbage Compactor

Note : Some images may be used for illustration purposes only.